



KX SERIES-General Purpose

KX2-1000 (2V1000AH)

Specification

Nominal Voltage	2V
Nominal Capacity(10HR)	1000.0AH
Dimensions	Length 475±3mm (18.70 inches)
	Width 175±2mm (6.89 inches)
	Container Height 328±3mm (12.91 inches)
	Total Height (with Terminal) 350±3mm (13.78 inches)
Approx Weight	Approx 57.0 kg (125.7lbs)
Terminal	T11
Container Material	ABS
Rated Capacity	1050.0 AH/52.50A (20hr, 1.80V/cell, 25°C/77°F)
	1000.0 AH/100.0A (10hr, 1.80V/cell, 25°C/77°F)
	870.0 AH/174.0A (5hr, 1.75V/cell, 25°C/77°F)
	756.0 AH/252.0A (3hr, 1.75V/cell, 25°C/77°F)
	607.0 AH/607.0A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	8000A (5s)
Internal Resistance	Approx 0.45mΩ
Operating Temp. Range	Discharge : -15~50°C (5~122°F)
	Charge : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 300.0A. Voltage 2.4V~2.5V at 25°C(77°F)Temp. Coefficient -5mV/°C
	No limit on Initial Charging Current Voltage 2.25V~2.3V at 25°C(77°F)Temp. Coefficient -3mV/°C
Standby Use	40°C (104°F) 103%
Capacity affected by Temperature	25°C (77°F) 100%
	0°C (32°F) 86%
	e-Solar KX series batteries may be stored for up to 6 months at 25°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Self Discharge	



Applications

- ◆ Tele-communication central station (wired or cellular)
- ◆ Power system communication, military communication, etc.
- ◆ Network communication including: data transmission, television signal transmission, etc.
- ◆ Uninterruptable Power System (UPS- for Telecom)



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	766.8	608.0	499.0	299.7	231.7	190.3	162.0	141.5	114.0	95.5	50.7
1.80V/cell	822.8	639.7	530.0	316.2	243.0	198.8	168.8	147.8	118.4	100.0	52.5
1.75V/cell	871.3	672.6	553.0	329.3	252.0	205.5	174.0	151.3	120.6	101.0	53.0
1.70V/cell	914.2	697.9	572.4	339.0	258.7	210.0	177.0	154.0	122.5	102.0	53.6
1.65V/cell	959.0	728.3	593.0	349.2	264.3	214.5	180.8	156.7	124.3	103.3	54.2
1.60V/cell	992.0	748.0	607.0	357.5	270.0	217.5	183.4	158.8	125.9	104.5	54.9



Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1465.4	1169.0	965.2	583.0	452.7	373.1	319.1	279.6	226.2	189.9	100.9
1.80V/cell	1559.7	1221.8	1019.5	612.1	472.7	388.5	331.1	290.9	234.2	198.6	104.4
1.75V/cell	1639.1	1277.1	1059.0	635.0	488.9	400.3	340.1	296.9	238.1	200.3	105.3
1.70V/cell	1705.4	1316.0	1090.3	650.9	499.9	407.4	345.0	301.7	241.6	202.2	106.3
1.65V/cell	1775.6	1365.6	1123.2	667.6	508.6	414.7	351.1	306.0	244.4	204.4	107.5
1.60V/cell	1818.3	1389.4	1141.8	679.3	516.8	418.7	354.8	309.2	247.1	206.5	108.6




Dimensions


T11 Terminal Unit: mm [inches]

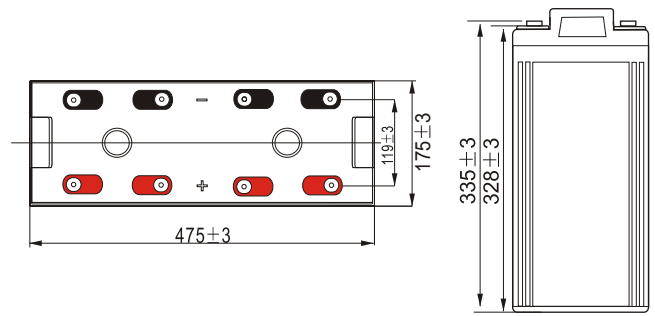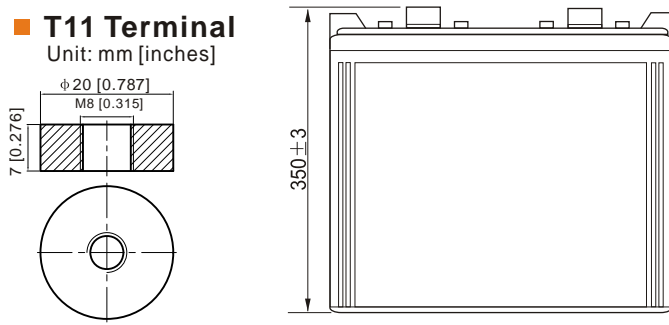


Discharge Characteristics

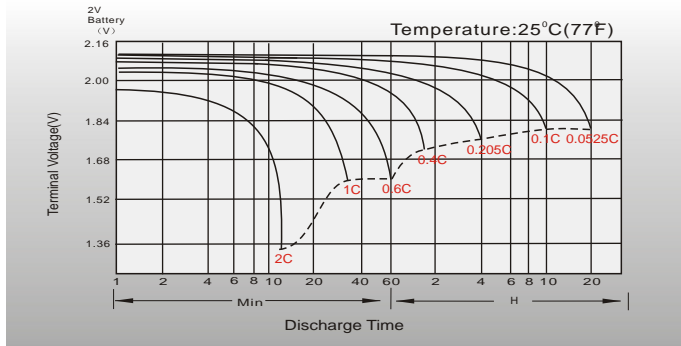


Float Charging Characteristics

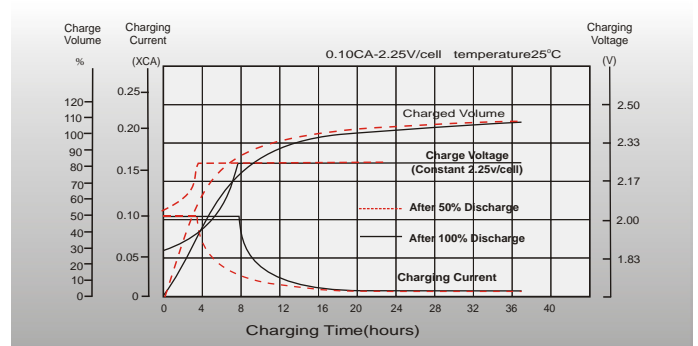


Temperature Effects in Relation to Battery Capacity

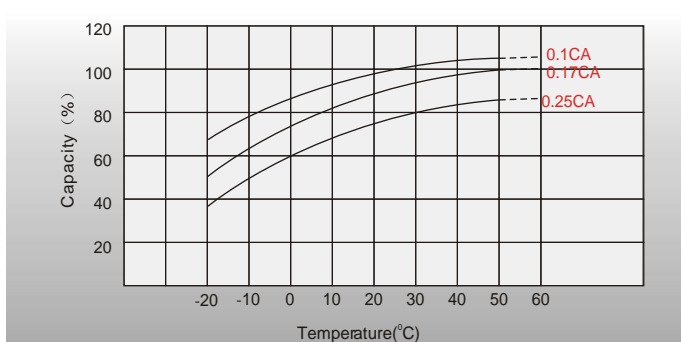


Effect of Temperature on Long Term Float Life

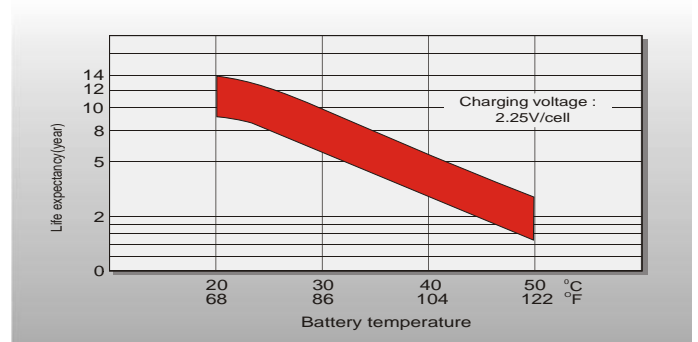

Cycle Life in Relation to Depth of Discharge

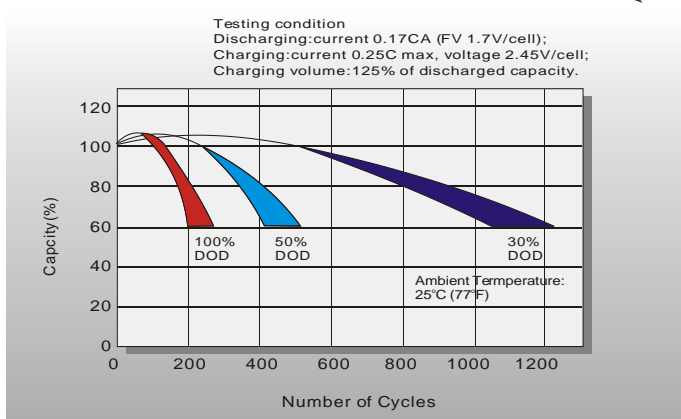

Self Discharge Characteristics

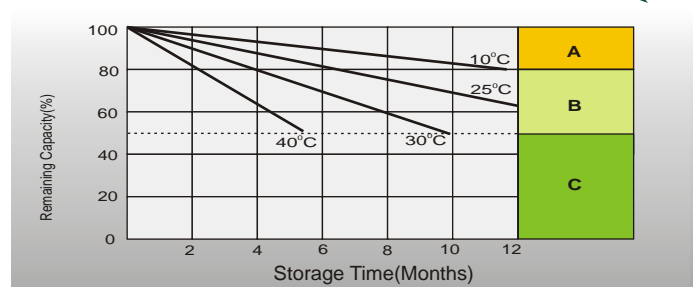

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

Australia:
P.O. Box 700 Innaloo
WA 6918 Australia
T: +61 8 63635420
F: +61 8 6210 1548
E: sales@esolar.com.au
www.esolar.com.au